

GO GUICE OFFSHORE

170 CLASS DP1 MINI SUPPLY VESSEL M/V GO PURSUIT



HULL SPECIFICATIONS

Length:	170'
Beam:	36'
Depth:	11' 6"
Draft Max:	10'
Clear Deck:	112' x 30.5'

CAPACITIES

Deck Cargo:	405 LT
Potable Water:	4,210 usg
Fuel:	60,498 usg / 132,066 usg*
Ballast Water:	74,493 usg
Liquid Mud:	1,704 bbls
Methanol:	N/A

*Fuel capacity when utilizing Liquid Mud tanks

PROPULSION

Main Engines:	2 x KTA 38MO
Total HP:	1,700 HP
Reduction Gears:	Twin Disc
Generators:	2 x 316kW
Bow Thruster:	500 HP, Electric Driven
Rudders:	2 Fishtail Type (65° Turn)

ACCOMMODATIONS

Certified to Carry:	24
Cabins / Berths:	10 / 24
Walk in Cooler:	Yes
Walk in Freezer:	Yes

PERFORMANCE

Survey Speed	4 kts	30 gph
Cruise	9 kts	70 gph
Max	11 kts	80 gph

ELECTRONICS

Radars:	Yes x 2
Auto Pilot:	MT
GPS (Navigation):	Yes
Echo Sounder:	Yes
VHF Radios:	Yes x 3
Dynamic Positioning:	MT-DP1
DP Reference System:	GPS
Electronic Plotter:	Yes
Sat Communication:	Vsat / Direct TV
GMDSS:	Yes

SPECIAL EQUIPMENT

Removable side bulwarks:	Yes
Transom:	Open, 22' Wide
Capable of zero discharge:	Yes
Moon Pools:	2 x 29" Inside Diameter
A-Frame:	Transom Mounted, 7.5t
Deck Winch:	Yes, Removable
NATO Grid:	2' x 2'

DOCUMENTATION


Flag:	US, International Service Sub L and I ON 1201189
Class:	ABS Loadline
Builder:	C&C Marine & Repair
Delivery Date:	2007

GO GUICE OFFSHORE


www.GuiceOffshore.com

Sales 985-273-2769 / Operations 337-889-0220


170 CLASS DP1 MINI SUPPLY VESSEL M/V GO PURSUIT

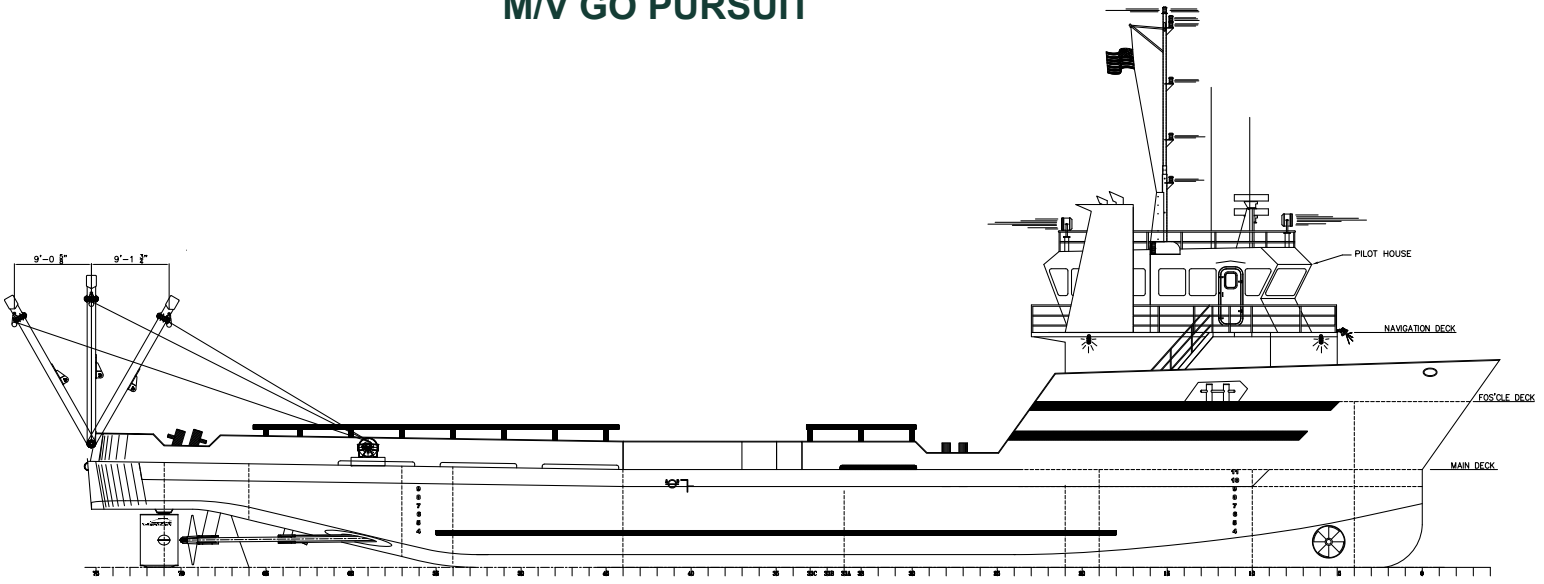


OUTBOARD PROFILE

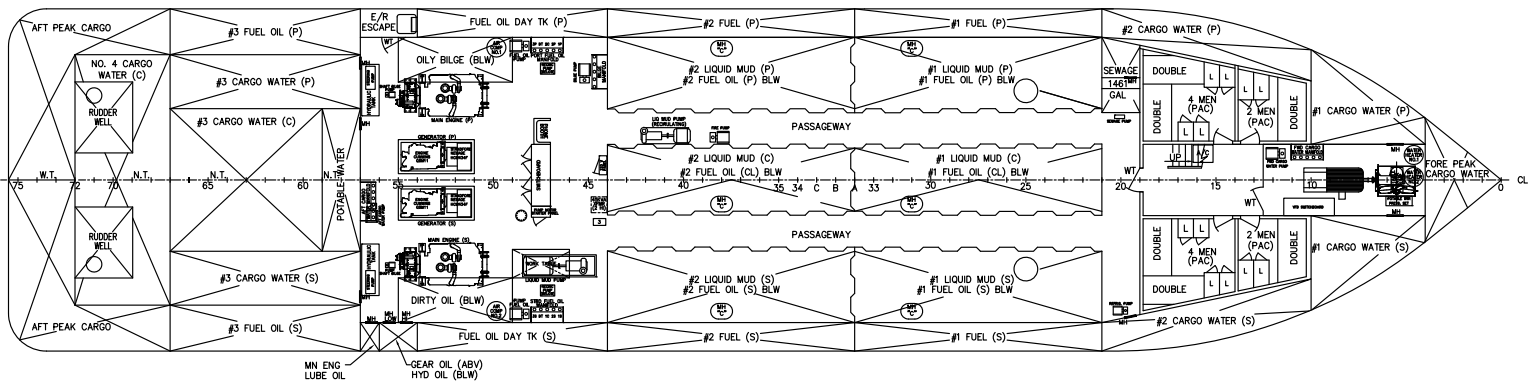

BELOW MAIN DECK

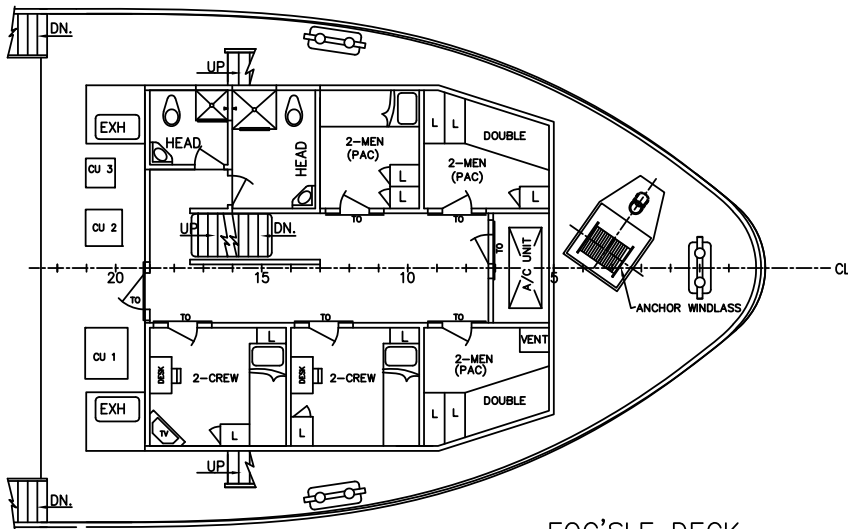


FOC'SLE DECK

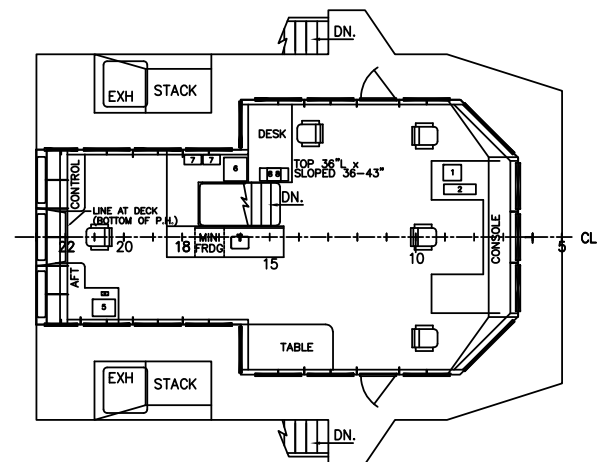

NAVIGATION DECK

GO GUICE OFFSHORE

170 CLASS DP1 MINI SUPPLY VESSEL M/V GO PURSUIT

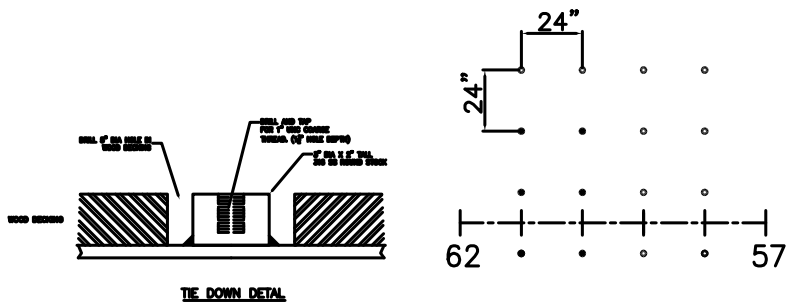


NATO GRID DETAILS

2' X 2' GRID
1" UNC NATIONAL COARSE THREAD

DECK WINCH DETAILS

BRADEN CH185-36120-01-1
18,500 LB BARE DRUM
14,580 LB MID DRUM
12,780 LB FULL DRUM
1,168 FT OF 3/4" LINE CAPACITY
1,561 FT OF 5/8" LINE CAPACITY
2,661 FT OF 1/2" LINE CAPACITY
34 FPM BARE DRUM 50 FPM FULL DRUM

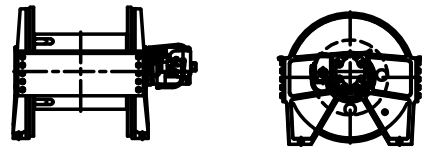

BRADEN CH185-36120-01-1

A-FRAME DETAILS

7.5 ST CAPACITY
14'-3/4" INSIDE WIDTH
24'-2" OUTSIDE WIDTH
19'-10" HEIGHT FROM DECK TO PAD-EYES

